


**INSTRUCTIONS
TO MOUNT RGB TOWER LIGHT TOPPER
ON ARISTOCRAT VERIDIAN CABINETS**



RGB TOPPER
CONNECTOR
MOLEX MALE
03-09-2022




**RGB TOWERLIGHT
TOPPER 104-08000**

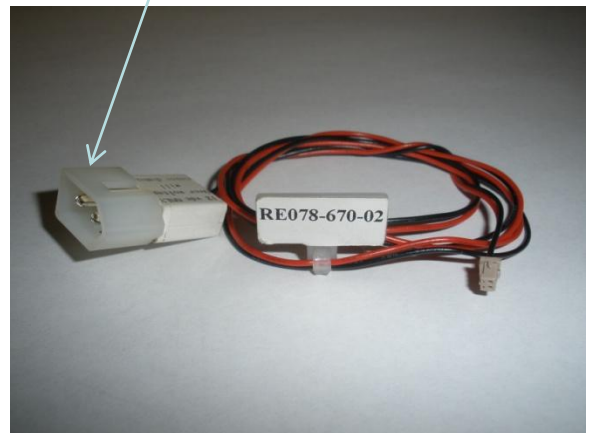

**RGB TOWERLIGHT TOPPER POWER
HARNESS RE078-670-02
PART OF 104-08000**


**ARISTOCRAT
SUPERCANDLE**

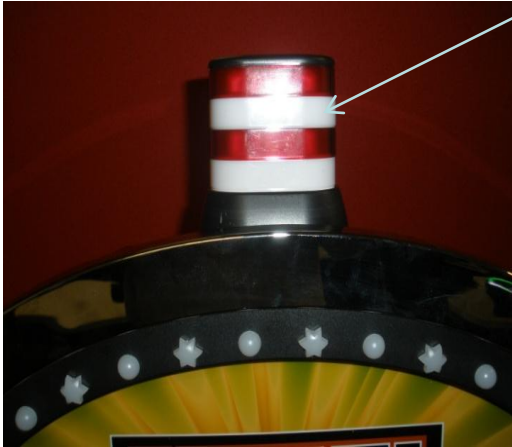

- Shut-off the power from the host machine until installation work is completed.
- Uninstall supercandle from Aristocrat Viridian Cabinets
- Remove top cover, tiers and plastic shield from supercandle.
- Drill thru hole .20" diameter on front hole from top to bottom as shown on picture




**TOP COVER TO BE
REPLACED**

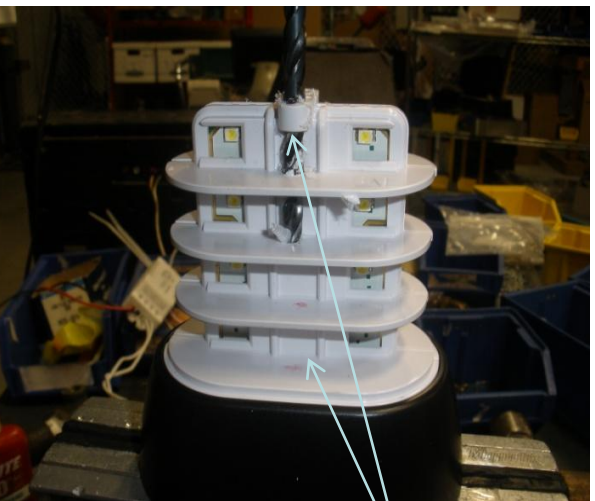

**FRONT HOLE TO BE
DRILLED**

**.20" DIAMETER
THRU HOLE**

**HARNESS
RE078-670-02**

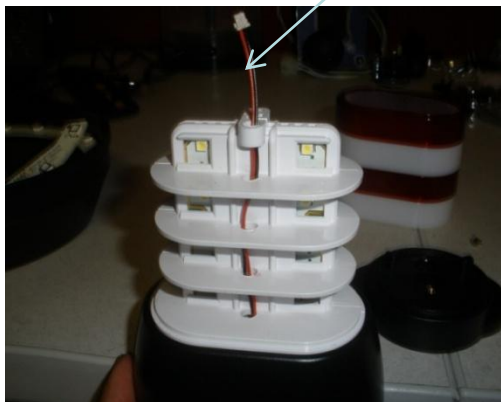

- Arrange the harness RE078-670-02 through the super candle from the bottom to the top with 2 pins connector facing up.
- Replace and screw candle base adapter 95-2860-00, using same screw that come with super candle.
- Open RGB tower light topper, remove front bezel, base topper, unscrew lower LED board to attach RGB tower light topper over super candle using PPH Screw M3x10MM




**M3 X 10MM PPH SCREW
PART OF RGB
TOWERLIGHT TOPPER**



**CANDLE BASE
ADAPTER
96-2860-00**



**LED BOARD
CONNECTOR J9**

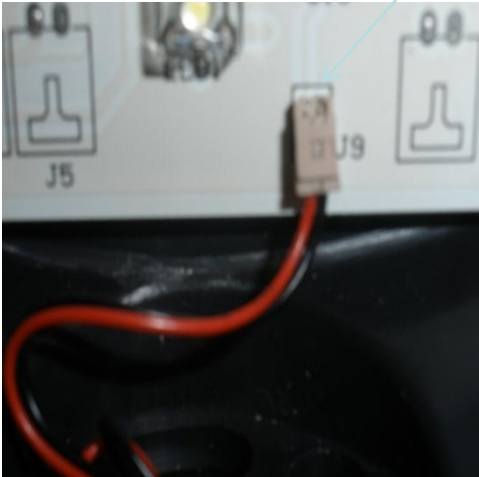

- Plug harness 2 pins connector (**RE078-670-02**) to RGB tower light topper LED board connector J9
- Tie wrap harness for strain relief as shown on picture.
- Install lower LED board and front bezel on topper
- To complete RGB tower light topper installation refer to RGB tower light Manual 104-08000



TIE WRAP

